


Sterling EM Series

Light Commercial
Water Conditioners
1.25" Valve



- Ideal for restaurants, large homes, and office buildings
- Sparkling dishes
- Improved dinning
- Protects plumbing

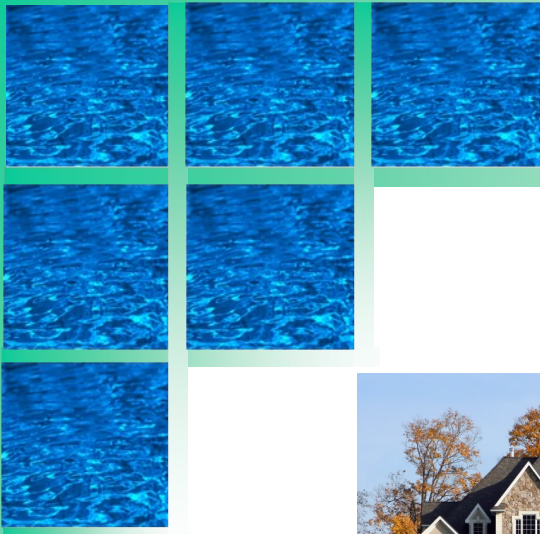

- **High Efficiency** Meter initiated control uses less salt and water than traditional water softeners.
- **Push Button Simplicity** All settings and programming information at your finger tips.
- **Hefty Brine Tank** Large 300 lbs. capacity tank reduces the frequency of salt refill. Salt platform keeps the salt dry and prevents bridging and mushing. Safety shut off prevents brine overflow.
- **Non-corrosive Construction** All components are made of fiberglass, stainless steel or similar materials to provide years of service without rust or corrosion.
- **Modular Design** Provides quick serving of the control. No bolts or screws means most repairs can be done without tools.
- **Adjustable Regeneration Cycle Sequences** Programming can be adjusted to handle your exact water conditions.

Model Number	Grain Capacity		Type of Regeneration	Service Flow Rate (gpm)		Resin Volume	Pipe Size
	Max.	Min.		Peak	Cont.		
EM30	30,000	21,000	Electronic Meter	12	8	1.0	1.25"
EM45	45,000	31,500		15	10	1.5	
EM60	60,000	42,000		18	12	2.0	
EM75	75,000	52,500		20	15	2.5	
EM90	90,000	63,000		24	18	3.0	
EM120	120,000	84,000		26	19	4.0	
EM150	150,000	105,000		28	20	5.0	

STERLING
WATER SYSTEMS
www.sterlingwatertreatment.com

