


Sterling FBW Series

Automatic
Backwash Filters



- *Versatile*
- *Fill port on some models*
- *Semi-transparent media tank*

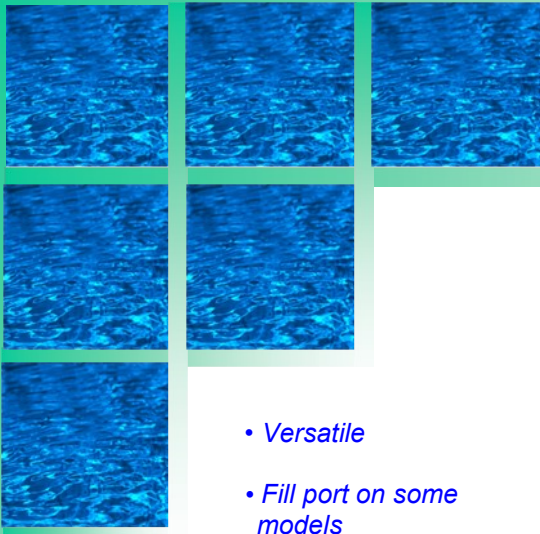

Automatic Backwash Filters

Available with the following media:

- **Activated Carbon (A10)** For the removal of chlorine; taste and odor reduction.
- **Filter Ag (F10)** Sediment removal down to 20 micron
- **Filter Sand (FS10)** Sediment reduction down to 17 micron
- **Birm (B10)** Iron removal when raw water has a high level of dissolved oxygen
- **Calcium Carbonate (C10)** Raises the pH of acid water and removes turbidity
- **Neutralizer Blend (N10)** Raises the pH higher than C10
- **Greensand (G10)** Removes iron if raw water pH is above 7.0 and potassium permanganate is used as a regenerate

Features:

- **Rugged Motorized Piston Control.** Heavy-duty drive motor with gear reduction box provides power to stand up to the worst iron, manganese, scale, and hardness.
- **Full Flow Bypass Valve.** Simple quarter turn of the handle takes the unit off stream. This is ideal for watering the yard or to provide water if a malfunction occurs.
- **Non-corrosive Construction.** Components are stainless steel, fiberglass, and polyethylene, eliminating rust and corrosion problems.

Model Number	Media Volume cu. ft.	Service Flow Rate (GPM)			Dimensions H" x W" x D"	Pipe Size
		Backwash	Peak	Cont.		
FBW10	1.0	5	10	3	56" x 12" x 18"	3/4"
FBW15	1.5	5	11	3	64" x 12" x 18"	
FBW20	2.0	7	13	4	59" x 12" x 18"	
FBW30	3.0	10	16	5	78" x 14" x 18"	1"

NOTE 1: Above filters are not designed for continuous flow applications like ground water heat pumps.

NOTE 2: Add suffix "DH" if a dome hole is desired. Example: FBW15-DH

