



STERLING

WATER TREATMENT

INT2 Series Water Softener

- Can be programmed to use as little as 4 lbs of salt per regeneration.
- Only 43 gallons of water used per regeneration.
- Effectively reduces clear water iron.
- Extremely small footprint. Fits where other water softeners won't.



STERLING
WATER TREATMENT

...THE NEXT GENERATION



www.sterlingwatertreatment.com

LOADED WITH FEATURES



EASY TO PROGRAM

JUST PUSH THE BUTTON TO SET THE TIME OF DAY AND HARDNESS...

YOU'RE DONE!

CONTROL VALVE DESIGNED FOR MINIMUM WATER AND SALT USAGE.

ADVANCED PROGRAMMING

ADJUSTMENT OF EACH CYCLE DURATION; REGENERATION TIME; AND DAYS OVER-RIDE

SPACE SAVING DESIGN


SMALL FOOTPRINT, ONLY 11"X23"

VORTEX DISTRIBUTOR

SCRUBS THE RESIN EACH REGENERATION TO EXTEND THE LIFE OF THE SOFTENER

SEPARATING BRINE TANK

BRINE TANK CAN BE SEPARATED FOR EASE OF CLEANING AND FLEXIBILITY OF INSTALLATION

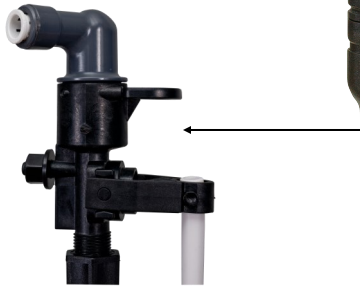

SAFETY BRINE VALVE

ELIMINATES MESSY OVERFLOW SHOULD A MALFUNCTION OCCUR

SALT SHELF

ALLOWS THE USE OF INEXPENSIVE SALT AND REDUCES THE CHANCE OF SALT BRIDGING AND MUSHING



EASY TO INSTALL... EASY TO SERVICE



RUGGED VALVE

MOTORIZED PISTON FOR YEARS OF TROUBLE FREE SERVICE



QUICK RELEASE DRAIN FITTING

NO THREADS TO LEAK. MERELY PULL CLIP TO REMOVE DRAIN FITTING



PUSH-IN BRINE LINE FITTING

ELIMINATES CONFUSING FERRULES AND NUTS THAT CAN CAUSE LEAKS



STAINLESS STEEL BYPASS

OPERATES WITH SINGLE HANDLE. 3/4" FEMALE THREADS STANDARD, 1" OPTIONAL

INT2 WATER SOFTENER

SPECIFICATIONS

Model Number	Grain Capacity		Flow Rate (gpm)		Salt Storage (lbs.)	Dimensions *Inlet Height				Pipe Size
	Max.	Std.	Peak	Service		A	*B	C	D	
INT2-S	30,000	24,000	14	8	120	44"	36.50"	13"	28"	3/4" or 1"

Replace "-S" suffix with "-1S" for 1" bypass.

Although this is a two tank system it is 20 square inches smaller than a typical cabinet one piece water softener. The two tanks can be separated by up to 15 feet. The salt storage tank can be located on either side of the resin tank or directly in front of it.

